
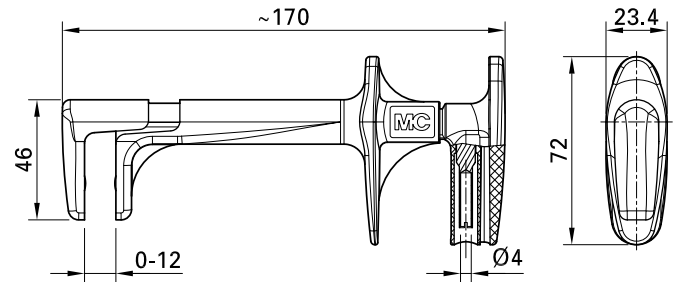


# GRIP-FMA

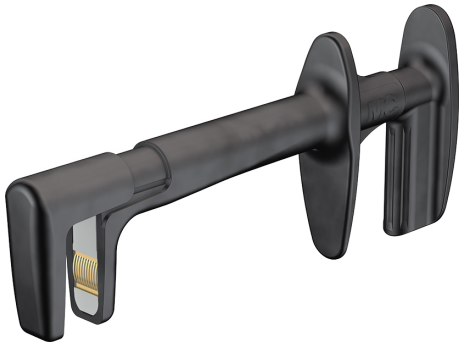

Item number 66.9435-\*

For fast and safe contacting on busbars, for example for the synchronization for standby power units. Powerful contacting on the front and rear of the busbars by means of our established MULTILAM. Ø 4 mm rigid socket in handle accepting spring-loaded Ø 4 mm plugs with rigid insulating sleeve.

Technical data	
Diameter of plug system	4 mm
Rated Values	1000 V, CAT IV, 32 A
Surface treatment electrical contact	Au
Standard color(s) *	<b>21</b>
Opening width	12.0 mm
Test accessory acc. to	IEC EN 61010-031
User-Information	I 111
Approvals	CE